

MB931U-1VB R1



USB 3.2 Gen 2 (Type-C) to U.2 NVMe SSD Adapter



MB031U-1SMB



USB 3.2 Gen 1 (Type-C) to 2.5" SATA SSD/HDD & M.2 SATA SSD Adapter



MB104U-1SMB R1





USB 3.2 Gen 2 (Type-C) to 2.5" SATA SSD/HDD & M.2 NVMe/SATA SSD Adapter

Copyright © ICY DOCK International. All Rights Reserved. 6503002 VER 3.0

1

Package Contents • Packungsinhalt • Contenu • Contenido del paquete • 包装について • 包装説明 • 包装说明


Device
(MB931U-1VB R1)Device
(MB031U-1SMB)Device
(MB104U-1SMB R1)

	 User Manual	 USB Type C to A Cable	 USB Type C to C Cable	 Power Adapter
MB931U-1VB R1	✓	✓	✓	✓
MB031U-1SMB	✓	✓		
MB104U-1SMB R1	✓		✓	


2

Device Information • Geräteinformationen • Informations dispositif • Información del dispositivo • 本体説明 • 機體説明 • 机体说明


▼ Inner View



MB931U-1VB R1

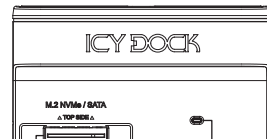


MB031U-1SMB

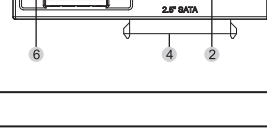


MB104U-1SMB R1

- Power Switch
- LED Indicator (Device Power : Solid Blue ; Drive Access : Flashing Blue)
- U.2 NVMe Connector
- 2.5" SATA Connector
- M.2 SATA Connector
- M.2 NVMe/SATA Connector

▼ Rear View

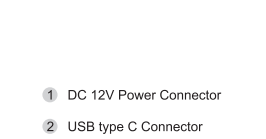

MB931U-1VB R1

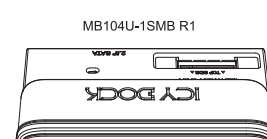

MB031U-1SMB




MB104U-1SMB R1


3 Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación • 製品の組み込み手順について • 操作步驟 • 操作步驟

MB931U-1VB R1


- Connect the USB cable and power adapter.

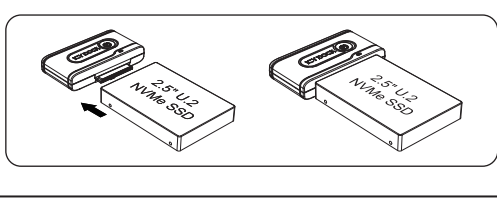

- Connect U.2 NVMe SSD to the MB931U-1VB R1.

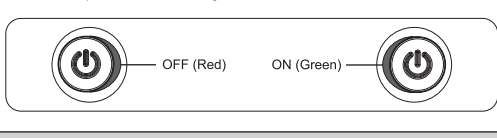

- Switch the power button to the right to turn on the device.

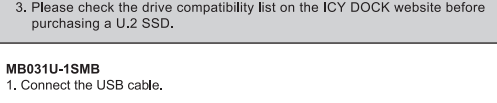


① Note:


- Make sure to turn off the device's power before installing or removing the drives.
- Due to compatibility reasons, the transfer speed may drop to 3.2 Gen 1 (5Gbps) when using certain U.2 SSDs or operating systems. If you are experiencing any performance issues, please get in touch with our customer support team.
- Please check the drive compatibility list on the ICY DOCK website before purchasing a U.2 SSD.

MB031U-1SMB


- Connect the USB cable.

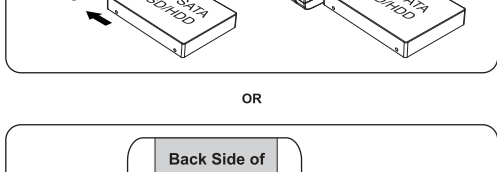

- Connect 2.5" SATA drive or M.2 SATA SSD to the device. Avoid connecting both 2.5" SATA and M.2 drives simultaneously.

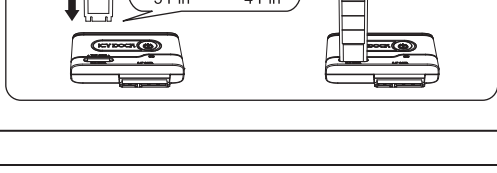

OR

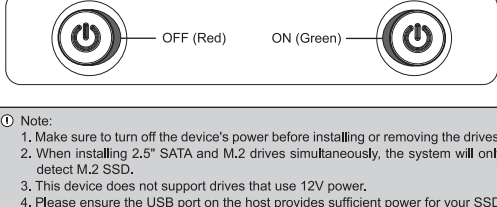


① Note:


- Make sure to turn off the device's power before installing or removing the drives.
- When installing 2.5" SATA and M.2 drives simultaneously, the system will only detect M.2 SSD.
- This device does not support drives that use 12V power.
- Please ensure the USB port on the host provides sufficient power for your SSD/HDD. Otherwise, the drive may not be detected when connected.
- The drive's connector might get oxidized over time and causes poor drive detection. It is recommended to use a rubber eraser or alcohol to clean the connector when it happens.

MB104U-1SMB R1


- Connect 2.5" SATA drive or M.2 SATA/NVMe SSD to the device. Avoid connecting both 2.5" SATA and M.2 drives simultaneously.

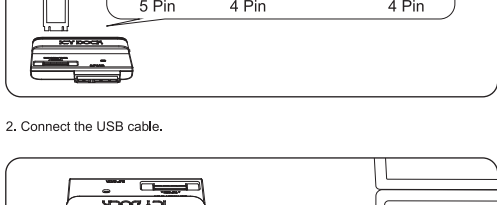

OR

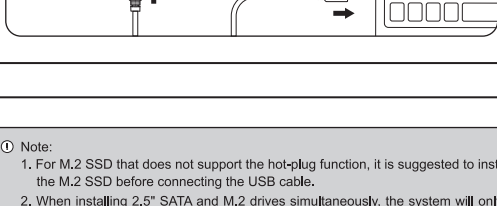

- Connect the USB cable.

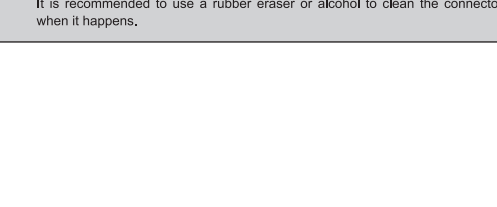

① Note:

- For M.2 SSD that does not support the hot-plug function, it is suggested to install the M.2 SSD before connecting the USB cable.
- When installing 2.5" SATA and M.2 drives simultaneously, the system will only detect 2.5" drive.
- This device does not support drives that use 12V power.
- Please ensure the USB port on the host provides sufficient power for your SSD/HDD. Otherwise, the drive may not be detected when connected.
- The drive's connector might get oxidized over time and causes poor drive detection. It is recommended to use a rubber eraser or alcohol to clean the connector when it happens.

