
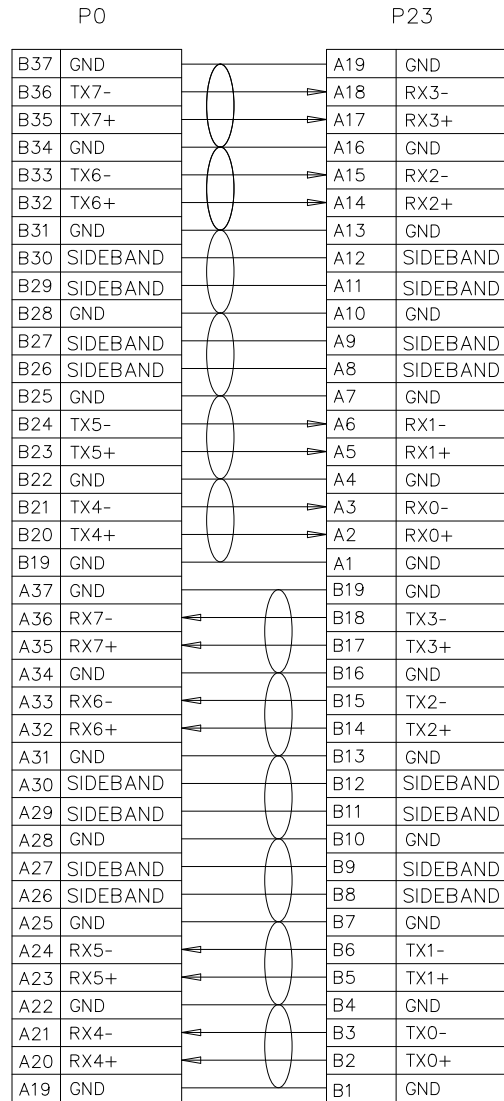


9	LATCH	STAINLESS STEEL	1	pcs
8	EXPANDO	PET BALCK DD: 10mm	A/R	mm
7	ACETATE TAPE	W=25±5mm,BLACK	A/R	mm
6	HOUSING	MCID 4X HOUSING, PA66+30%GF,BALCK	2	PCS
5	PCBA	MCID 4X PCB, PIN:30u Au, 88±8 ohm	2	PCS
4	HOUSING	MCID 8X HOUSING, PA66+30%GF,BALCK	1	PCS
3	PCBA	MCID 8X PCB, PIN:30u Au, 88±8 ohm	1	PCS
2	MOLDING	PA,BALCK	A/R	9
1	CABEL	<30AWG*2C+2D>AL+MYLAR,DD:1.0*1.85MM,85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

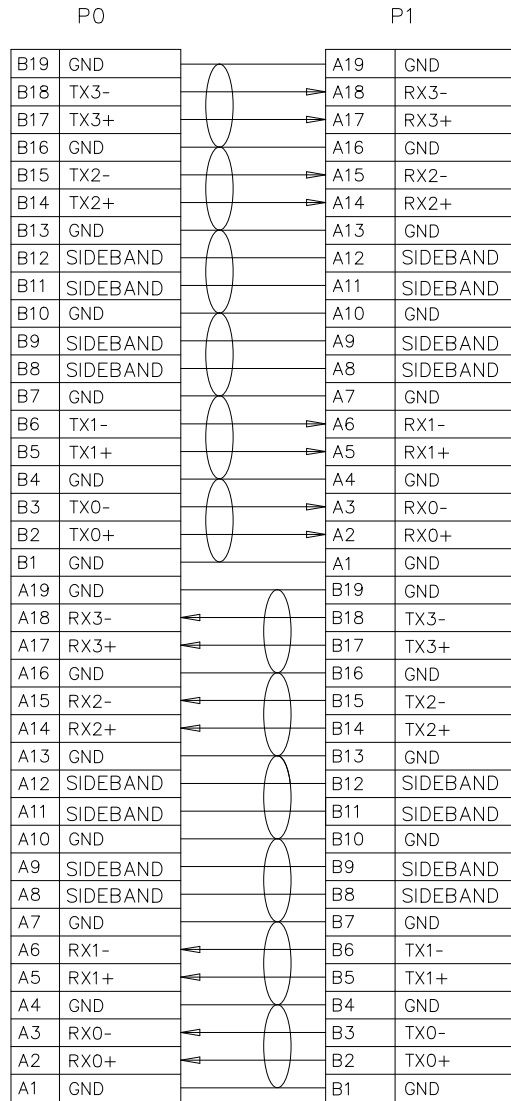

ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:10M Ohm(Min);
- d. CONDUCTIVE RESISTANCE:2 Ohm(Max).