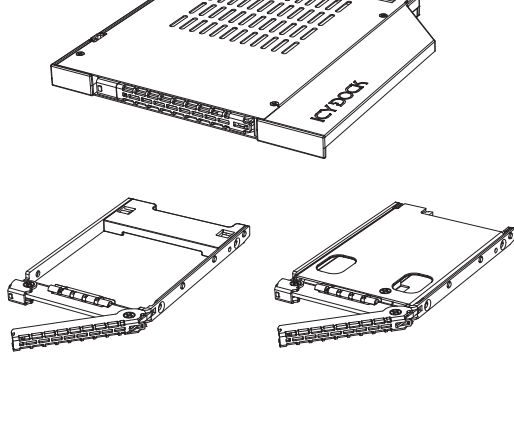



MB411V4PO-2B U.2/U.3 SSD Mobile Rack for Ultra Slim ODD Bay
MB411M4PO-2B M.2 NVMe SSD Mobile Rack for Ultra Slim ODD Bay

Copyright © ICY DOCK International. All Rights Reserved. 650321 VER 1.0


Cremax Europe GmbH
Email: support@icydock.com
Weidenweg 21H, 47059 Duisburg, GermanyBeyond Technologies UK Ltd
Email: info@beyondtech.co.uk
Unit B6, Halesfield 11, Telford, Shropshire, TF7 4PH, U.K.

1

Package Contents • Packungsinhalt • Contenu • Contenido del paquete • 包装について • 包裝說明 • 包装说明



or




MB411M4PO-2B

MB411V4PO-2B



User Manual


6 x M2*4 flat head screws
for device
(2 x screws for spare parts)4 x M3*4 flat head screws
for drive or M.2 adapter1x extra M2 SSD Locking Clip
(MB411M4PO-2B only)

Note: Please use the included screws to secure the device.

2


Device Information • Geräteinformationen • Informations dispositif • Información del dispositivo • 本体説明 • 機體說明 • 机体说明

▼ Front View (MB411M4PO-2B & MB411V4PO-2B)




- 1 Drive tray release button
2 LED indicator (Drive power : solid green ; SSD access : flashing green)

▼ Rear View (MB411M4PO-2B & MB411V4PO-2B)




- 1 OCulink 4i connector
2 Floppy 4-Pin power connector

▼ Tray Top View (MB411V4PO-2B)

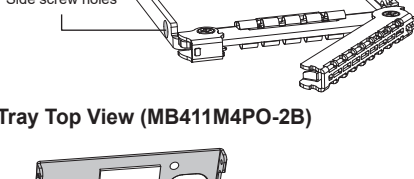

▼ Tray Top View (MB411M4PO-2B)

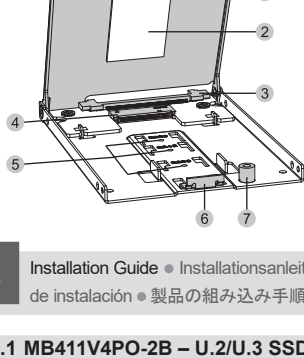

- 1 Heat sink cover
2 Thermal pad
3 U.2 connector (SFF-8639)
4 M.2 M-key connector
5 M.2 SSD 2280/2260/2242/
2230 lock point (Default in
2280 lock point)
6 M.2 SSD Locking Clip
7 Cover screw holes

3

Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación • 製品の組み込み手順について • 操作步驟 • 操作步驟

3.1 MB411V4PO-2B – U.2/U.3 SSD Installation


3.1-1




3.1-2




3.1-3




3.1-4

Remove the plastic bar and keep the
M3*4 flat head screws as spare drive
screws.


3.1-5

This tray accommodates U.2/U.3
SSDs with up to 7mm height.

3.1-6

Please use the included M3*4 flat
head screws to secure the drive.

3.1-7




3.1-8




3.2 MB411M4PO-2B – M.2 NVMe SSD Installation


3.2-1




3.2-2




3.2-3

Grasp the two holes on heat sink cover
and open as indicated by the arrow in
the illustration.


3.2-4

A locking clip is pre-installed at the 2280 position.
•For 2280 M.2 SSDs, use the pre-installed clip.
•For 2230/2242/2260 M.2 SSDs, insert the
included extra clip into the correct slot.
Slide the clip backward to lock it in place or
forward to remove it.


3.2-5

Insert the end of the M.2 NVMe SSD
with the gold fingers into the M.2
connector on the drive tray at an angle,
as shown in the illustration.


3.2-6

After inserting the M.2 SSD, press down
on the end with the screw hole until the
metal spring latch on the M.2 SSD locker
snaps back into place, securing the M.2
SSD.

3.2-7

Remove the protective film from the thermal
pad, then paste the thermal
pad onto the heat sink cover.


3.2-8




3.2-9

(Optional) Use the included M3*4 flat
head screw to secure the heat sink
cover with the M.2 adapter.

3.2-10



3.2-11



Please use the included M2*4 screws to secure the device onto the Ultra Slim ODD Bay.



Note : This device is not compatible with laptop ODD bay.

Warranty

icydock.com/warranty



Check coverage and terms

Product Resources

Specs · Data Sheet · FAQ



MB411V4PO-2B



MB411M4PO-2B

ICY DOCK reserves the right to change product specifications, components, or accessories without prior notice.