

Copyright © ICY DOCK International. All Rights Reserved.



Cremax Europe GmbH
Email: support@icydock.com
Weidenweg 21H, 47059 Duisburg, Germany




Beyond Technologies UK Ltd
Email: info@beyondtech.co.uk
Unit B6, Halesfield 11, Telford, Shropshire, TF7 4PH, U.K.

1

Package Contents • Packungsinhalt • Contenu • Contenido del paquete

• 包装について • 包装説明 • 包装说明




Device



User Manual



1 x #6-32*5 for Device



Full & Half Height Expansion Slot Faceplate


ⓘ **Note:** Please use the included screws to secure the device.

2

Device Information • Geräteinformationen • Informations dispositif

• Información del dispositivo • 本体説明 • 機體説明 • 机体说明

▼ Front View

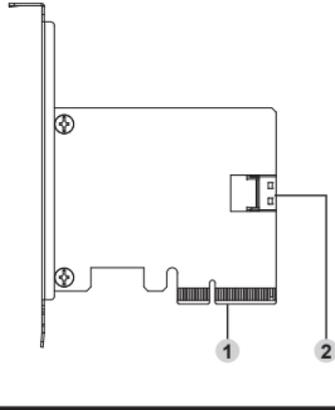

1 PCIe x4 Gold Finger

2 SlimSAS 4i Connector


3

Device Installation • Installation eines Gerätes • Installation du dispositif

• Instalación del dispositivo • デバイス取付手順 • 装置安裝步驟


• 设备安装步骤

3-1

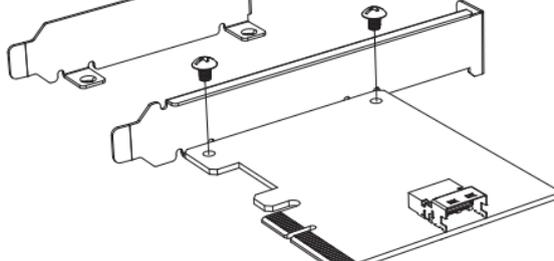

Select the Full/Half Height Expansion Slot Faceplate according to the chassis I/O space specifications, and secure it to the adapter with two bracket screws.

3-2

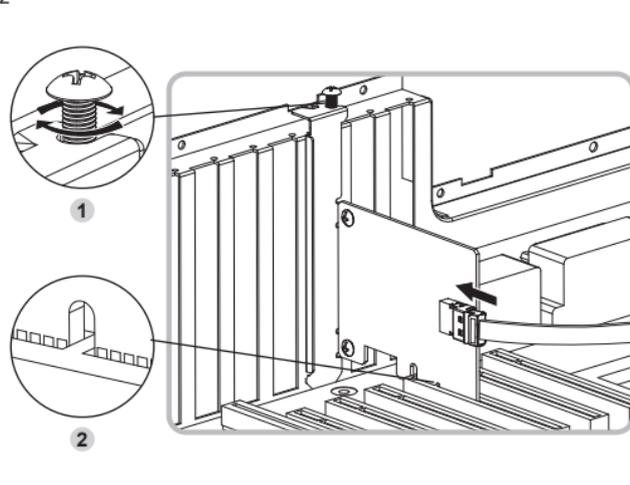ⓘ **Note:**

1.Safety First: Before any hardware installation, please ensure all power is switched off and cords are disconnected for your safety and to protect the equipment.

2.Handling Adapter: Kindly handle the circuit boards with care, as they are sensitive to static. We strongly advise grounding yourself to avoid electrical damage.

3.Securing the Adapter: Please use the included screws to secure the device firmly in place.

4.Cable Management: When disconnecting cables, always gently press the overmold to release the connector latches. This helps prevent any harm to the cable or connector.

5.Device Placement: Please place the adapter in a safe location, away from magnetic fields, high voltage, direct sunlight, and moisture to ensure its longevity.

Recommended Usage and Compatibility Note:

To ensure the best performance and compatibility, we strongly recommend using ICY DOCK's certified cables and NVMe drive enclosures with this adapter card. This minimizes the risk of signal loss or connection errors, especially under PCIe Gen 4/5 high-speed operations.

To explore compatible SSDs, host cards, and enclosures, please visit our NVMe Storage Selection Guide:

<https://global.icydock.com/nvmetool.html>

Technical Specification:

| | |
|-----------------------------|---|
| Model | MB408A4 |
| Compatible Drive Type | NVMe |
| Support Slots | 1 x PCIe 3.0 or 4.0 x4 / x8 / x16 expansion slot |
| Host Interface | PCIe 4.0 x4 |
| Endpoint Interface | 1 x SlimSAS 4i(SFF-8654), Pin-out defined by SFF-9402 Rev 1.1 |
| Transfer Rate | PCIe 4.0 x 4 up to 64Gbps |
| Supported Operating Systems | No limitation |
| Package Contents | Device, user manual, half height IO faceplate, screw |
| Compliance | CE, UKCA, RoHS, REACH |
| Warranty | 2 years warranty |



Warranty
[icydock.com/warranty](https://www.icydock.com/warranty)



Product Resources
Specs · Data Sheet · FAQ

ICY DOCK reserves the right to change product specifications, components, or accessories without prior notice