

MB873MP-B V2



Scan the QR code for more product information

Copyright © ICY DOCK International. All Rights Reserved. 650309 VER 1.0




Cremax Europe GmbH
Email: support@icydock.com
Weidenweg 21H, 47059 Duisburg, Germany




Beyond Technologies UK Ltd
Email: info@beyondtech.co.uk
Unit B6, Halesfield 11, Telford, Shropshire, TF7 4PH, U.K.


1 Package Contents • Packungsinhalt • Contenu • Contenido del paquete • 包装について • 包装説明 • 包装说明




Device



User Manual



Drive ID Plugs



Thermal Pad × 16




8 x M3*6 Pan Head Screw for Device
(2 x Screw for Spare Parts)

⚠ Note: Please use the included screws to secure the device


2 Device Information • Geräteinformationen • Informations dispositif • Información del dispositivo • 本体説明 • 機體説明 • 机体说明

▼ Front View

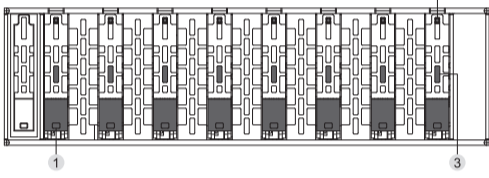


- 1 Drive Tray Ejection Button
- 2 LED Indicator (Power: Solid Green; Drive Access: Flashing Green)
- 3 Slot for Drive ID Plug

▼ Rear View

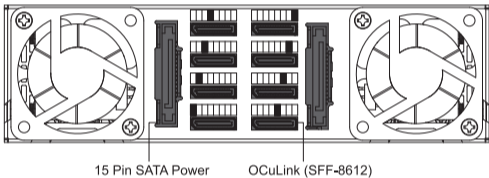

15 Pin SATA Power OCuLink (SFF-8612)

▼ Tray Inner View

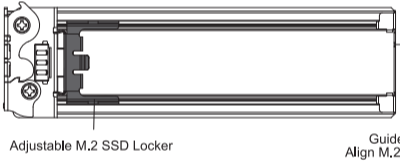


Adjustable M.2 SSD Locker

Guide Pin to Align M.2 Connector


3 Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación • 製品の組み込み手順について • 操作步驟 • 操作步驟

3-1




Push the tray ejection button to eject the drive tray.

3-2




Remove the protective film on both sides of the 1mm-thick thermal pad.

3-3

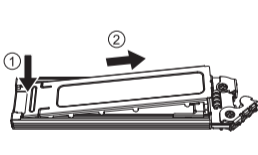


3-4

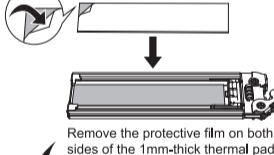

Remove the protective film on both sides of the 1mm-thick thermal pad.

(Optional)

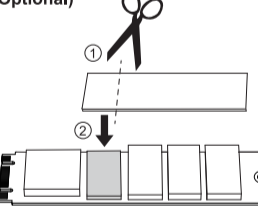


If there is a significant height difference between the components on the M.2 drive, use an unused thermal pad, cut it into small pieces and paste it onto the shorter component for a complete contact with the thermal pad.


⚠ Warning

If using the 1mm thermal pad on the M.2 drive and it prevents M.2 drive from mating with the enclosure's connector correctly, please use the 0.7mm thermal pad instead.

3-5

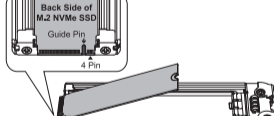


3-6

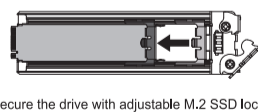


Secure the drive with adjustable M.2 SSD locker.


3-7

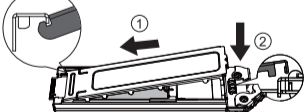

3-8

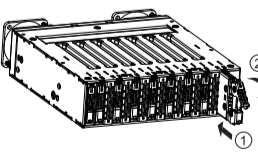


3-9

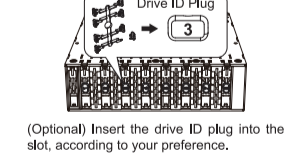

(Optional) Insert the drive ID plug into the slot, according to your preference.

4 Device Installation • Installation eines Gerätes • Installation du dispositif • Instalación del dispositivo • デバイス取付手順 • 装置安裝步驟 • 裝置安裝步驟

*Cables are not included

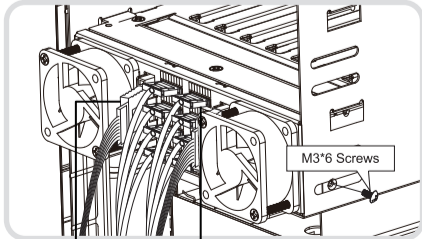

15 Pin Connector OCuLink Cable

1. Secure the device into the external 5.25" bay by the included M3*6 screws.
2. Connect the 8 x OCuLink ports and the 2 x SATA 15 Pin power to finish the installation.

⚠ Note: If the drive is not detected by the system, go to "device manager", right click on "disk drives" and then select "scan for hardware changes" to perform manual hardware refresh



ICY DOCK reserves the right to change product specifications, components, or accessories without prior notice. For the warranty information, please visit www.icydock.com/warranty.php