

Copyright © ICY DOCK International. All Rights Reserved. 650331 VER 1.0



Cremax Europe GmbH
Email: support@icydock.com
Weidenweg 21H, 47059 Duisburg, Germany



Beyond Technologies UK Ltd
Email: info@beyondtech.co.uk
Unit B6, Halesfield 11, Telford, Shropshire, TF7 4PH, U.K.

1


Package Contents • Packungsinhalt • Contenu • Contenido del paquete
• 包装について • 包装説明 • 包装说明



MB998V4P-B



User Manual



Drive ID Plug



18 x M3*4 Flat Head Screw
for U.2/U.3 SSD
(2 x screw for spare parts)




10 x M3*2.5 Pan Head Screw
for MB998V4P-B
(2 x screw for spare parts)

❗ Note: Please use the included screws to secure the MB998V4P-B & U.2/U.3 SSDs.

2


Device Information • Geräteinformationen • Informations dispositif
• Información del dispositivo • 本体説明 • 機體説明 • 机体说明

▼ Front View

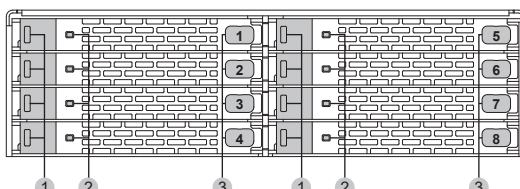

- ① Drive Tray Ejection Button
- ② LED Indicator (Power : Solid Green ; Drive Access : Flashing Green)
- ③ Slot for Drive ID Plug

▼ Rear View

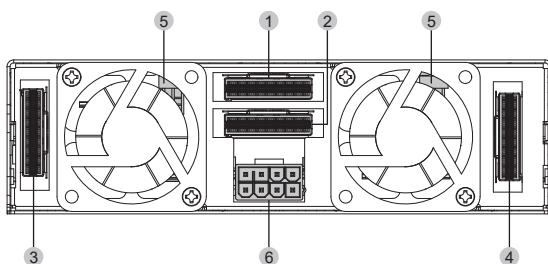

- ① SlimSAS 8i Connector for Slot 1 & 5
- ② SlimSAS 8i Connector for Slot 2 & 6
- ③ SlimSAS 8i Connector for Slot 7 & 8
- ④ SlimSAS 8i Connector for Slot 3 & 4
- ⑤ 3 Pin Fan Header Port
- ⑥ 8 Pin PCIe Power


3

Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación
• 製品の組み込み手順について • 操作步驟 • 操作步驟


3-1




3-2



3-3




3-4




Please do not discard the removed screws, as it is for U.2/U.3 SSD mounting purpose

3-5




The tray accommodates U.2/U.3 SSD up to 7mm in height. Please follow the arrow direction when insert the U.2/U.3 SSD to the tray

3-6




Flip to the bottom side of the tray along with the drive and use the included M3*4 screws to secure the drive onto the tray

3-7




3-8



Optional: Insert the drive ID plug into the slot, according to your preference

4

Device Installation • Installation eines Gerätes • Installation du dispositif
• Instalación del dispositivo • デバイス取付手順 • 裝置安裝步驟 • 设备安裝步驟

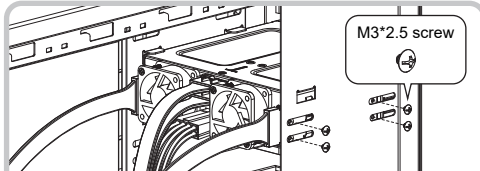

1. Insert the device into external 5.25" bay and use the included M3*2.5 screw to secure the device.
2. Connect 8 Pin PCIe power and SlimSAS 8i (SFF-8654) cables to the MB998V4P-B to finish installation.



Warranty
icydock.com/warranty



Product Info
Specs/Manual/Compatibility

ICY DOCK reserves the right to change product specifications, components, or accessories without prior notice.